


Standard-Kettenräder
Serie 25B

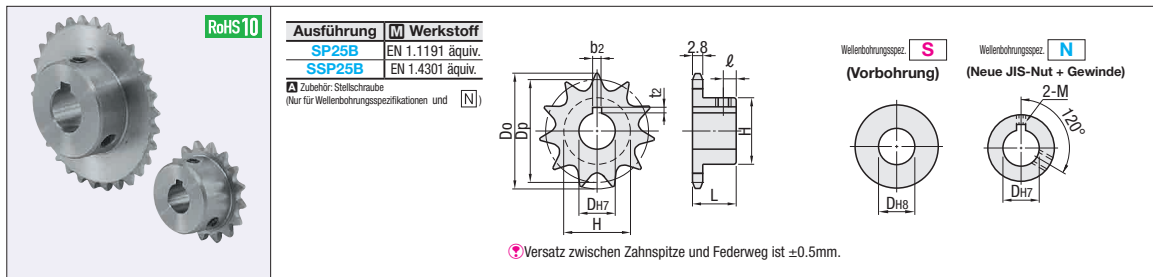

Teilenummer		Wellenbohrungsspez.	Wellenbohrungs-Ø					Dp	Do	H	L	ℓ	Gewicht (g)	Stückpreis			
Ausführung	Anz. Zähne		S Spezifikation (Dse)	N Spezifikation (Dh7)										S Spezifikation	N Spez. (auf Lager)	N Spez. (Nicht auf Lager)	
SP25B	16	S	9	10*	10K*	12*		32.55	36	25	15	6	60				
	17		9	10*	10K*	12*		34.56	38				70				
	18		9	10*	10K*	12*		36.57	40								
	19		9	10*	10K*	12*		38.58	42				90				
	20		9	10*	10K*	12*		40.59	44	28	100						
	21		9	10*	10K	12*		42.61	46			110					
	22		9		12*	15*		44.62	48			120					
	23		9		12*	15*		46.63	50								
	24		9		12*	15*		48.65	52	30	140						
	25		9	12*	15*	16*		50.66	54								
	26		9	12*	15	16		52.68	56								
	28		9	12*	15*	16*		56.71	60			150					
	30		9		12*	15*	16		60.75	64	35	160					
	32		10		15*	16	20*		64.78	68							
	34		10		15	16	20		68.82	72					-		
	35		10		15	16	20		70.84	74					-		
36	10		15	16	20		72.86	76	40	20	8	220			-		
38	10		15	16	20		76.9	80				260			-		
40	10		15*	16*	20*		80.93	84				270					
SSP25B	16	S	9	10*				32.55	36	21	16	6	60				
	17		9	10				34.56	38	23			70			-	
	18		9	10*				36.57	40	25			90				
	19		9	10	12*			38.58	42	26							
	20		9	10*	12*			40.59	44	28	18	7	100				
	21		9		12	15*		42.61	46	110							
	22		9		12	15*		44.62	48	120					-		
	23		9		12	15		46.63	50	140					-		
	24		9		12	15		48.65	52	30	18	8	150			-	
	25		9	12*	15			50.66	54				160			-	
	26		9		12	15		52.68	56				200			-	
	28		9		12	15		56.71	60				220			-	
	30		9		12	15		60.75	64	8	8	8	150			-	
	32		10		12	15*		64.78	68				200				

⚡ Wenn 10K gewählt wird, ist der Wellenbohrungs- Ø=10 und die Nutbreite beträgt 4mm (1.8mm hoch).

Spezifikationen für Wellenbohrungs


Wellenbohrungs-Ø D	Federweg bxtz	Gewindestift M
10	3x1.4	4
10K, 12	4x1.8	5
15, 16	5x2.3	6
20	6x2.8	6



Ordering Example

Teilenummer	-	Spezifikation für Bohrung	-	Wellenbohrungs-Ø
SP25B16	-	N	-	10
SSP25B22	-	S	-	9

Standard-Kettenräder
Serie 35B

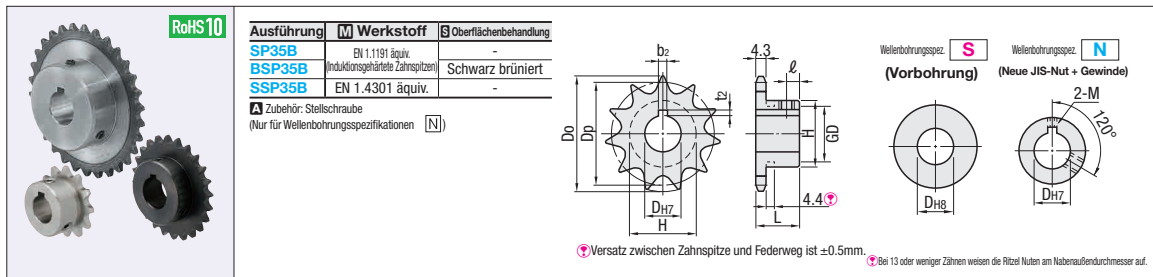

Teilenummer		Wellenbohrungsspez.	Wellenbohrungs-Ø										Dp	Do	H	GD	L	ℓ	Gewicht (g)	Stückpreis		
Ausführung	Anz. Zähne		S Spezifikation (Del)	N Spezifikation (DH7)																S Spezifikation	N Spez. (Auf Lager)	N Spez. (Nicht auf Lager)
SP35B	9	S N	8	10*	10K*													60				
	10		8	10*	10K*	12*												80				
	11		8	10*	10K*	12*													90			
	12		9	10*	10K*	12*	14*	15*	16*	17*									120			
	13		9	10*	10K*	12*	14*	15*	16*	17*												
	14		9	10	10K*	12*	14	15*	16	17*												
	15		9	10*	10K*	12*	14*	15*	16	17*	18*	19*	20*						160			
	16		9	10*	10K*	12*	14	15*	16	17*	18*	19	20*	22					190			
	17		11	12*	14	15*	16	17*	18*	19	20*	22	24	25*					220			
	18		11	12*	14	15*	16*	17*	18*	19	20*	22	24*	25*					250			
	19		11	12	14	15*	16	17	18	19	20*	22	24	25					280			
	20		11	12*	14	15*	16*	17*	18*	19	20*	22	24	25*	26*	30*				320		
	21		11	12	14	15	16	17	18*	19	20*	22	24	25	26	30				360		
	22		11	12	14	15	16	17	18	19	20*	22	24	25*	26	30				370		
	23		11	12	14	15	16	17	18	19	20*	22	24	25	26	30*				380		
	24		11	12*	14	15*	16	17	18	19	20*	22	24	25	26	30				430		
	25		11	15*	16*	17	18	19	20*	22	24*	25*	26	30*					440			
	26		11	15*	16	17	18	19	20*	22	24	25	26	30					450			
	27		11	15*	16	17	18	19	20	22	24	25	26	30					480			
	30		11	15*	16	17	18	19	20*	22	24	25*	26	30			53		510			
32	11	15*	16	17	18	19	20*	22	24	25	26	30					540					
34	11																570	-				
35	11																580	-				
36	11																590	-				
38	11																610	-				
40	12																820	-				
																	850	-				
BSP35B (BSPasst nicht zur Spez. S.)	9	N	10	10K														60	-			
	10		10	10K*	12*													80	-			
	11		10	10K*	12*														90	-		
	12		10	10K*	12*	14	15*	16*	17*										120	-		
	13		10*	10K	12*	14	15*	16	17													
	14		10	10K	12*	14	15*	16	17													
	15		10*	10K	12*	14	15*	16	17	18*	19	20*							160	-		
	16		10	10K	12*	14	15*	16	17*	18	19	20*	22						190	-		
	17		12	14	15	16	17	18	19	20	22	24	25						220	-		
	18		12*	14	15*	16*	17	18	19	20*	22	24	25						250	-		
	19		12	14	15	16	17	18	19	20	22	24	25						280	-		
	20		12*	14	15*	16	17	18	19	20*	22	24	25*	26	30				320	-		
	21		12	14	15	16	17	18	19	20	22	24	25	26	30				360	-		
	22		12*	14	15	16	17	18	19	20	22	24	25	26	30				370	-		
	23		12	14	15	16	17	18	19	20	22	24	25	26	30				380	-		
	24		12	14	15	16	17	18	19	20	22	24	25	26	30				570	-		
	25		15	16	17	18	19	20	22	24	25	26	30					590	-			
	26		15	16	17	18	19	20	22	24	25	26	30					610	-			
	27		15	16	17	18	19	20	22	24	25	26	30					450	-			
	28		15	16	17	18	19	20	22	24	25	26	30					480	-			
30	15	16	17	18	19	20	22	24	25	26	30			53		510	-					
32	15	16	17	18	19	20	22	24	25	26	30					540	-					
34	20	22	24	25	26	30											570	-				
35	20	22	24	25	26	30											590	-				
36	20	22	24	25	26	30											610	-				
38	20	22	24	25	26	30											820	-				
40	20	22	24	25	26	30											850	-				
SSP35B	10	S N	8	10*	12*													80				
	11		8	10*	12*																	
	12		9	10*	12*	15*													120			
	13		9	10	12	15*	16															
	14		9	10	12*	15*	16															
	15		9	10	12*	15*	16*												160			
	16		9	10*	12*	15*	16*	18*	20*										190			
	17		12	15	16	18	20												220			
	18		11	12*	15*	16	18	20											250			
	19		11	12*	15*	16	18	20*											320			
	21		11	12	15	16	18	20											360			
	22		11	12	15*	16	18	20											370			
	23		11	12	15	16	18	20											380			
	24		11	12	15*	16	18	20*	22	25*									430			
	28		11	15	16	18	20	22	25										540			
	30		11	15	16	18	20	22	25										570			
	32		11	15	16	18	20	22	25										590			
	40		12	18	20	22	25												850			