



DIN Bohrbuchsen

-DIN172A DIN179A-

CAD Data




RoHS10


Ausführung		Werkstoff	D	Härte
mit Bund	zylindrisch			
DIN172A	DIN179A	1.0718/ 11SMnPb30	2.5-26	62 +/-2 HRC
		1.7131/ 16MnCr 5	28-35	

6.3/ (0.8/0.5)

DIN 172 A

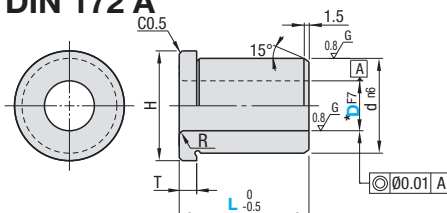

DIN 179 A

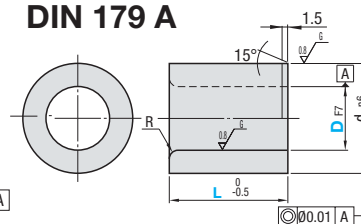

Alle Angaben ohne Toleranz nach :
JIS B 0405-1991-m (DIN ISO 2768-m)

Teilenummer	D	D Toleranz	L			d n6	H	R	T	
		F7	kurz	mittel	lang					
DIN172A DIN179A	2.5	+0.016	6	9		5	8	1	2	
	3	+0.006	8 12 16			6	9		2.5	
	3.3	+0.022 +0.010				7	10			
	3.5					8	11			
	4					10	13			
	4.2		+0.028 +0.013	12	15	1.5	3			
	4.5	10 16 20		15	18					
	5			12 20 25	18			22	2	4
	5.5				16 28 36			22		
	6		20 36 45			26	30			
	6.5	25 45 56				30	34	3		
	6.8			+0.041 +0.020		35	39			
	7				25 45 56	42	46			
	7.5		+0.050 +0.025			48	52			
	8	25 45 56				48	52			
	8.5			25 45 56		48	52			
	9				25 45 56	48	52			
	9.5		25 45 56			48	52			
	10	25 45 56				48	52			
	10.2			25 45 56		48	52			
	10.5				25 45 56	48	52			
	11		25 45 56			48	52			
	12	25 45 56				48	52			
	13			25 45 56		48	52			
	14				25 45 56	48	52			
	15		25 45 56			48	52			
	16	25 45 56				48	52			
	17			25 45 56		48	52			
	18				25 45 56	48	52			
	19		25 45 56			48	52			
	20	25 45 56				48	52			
	22			25 45 56		48	52			
	24				25 45 56	48	52			
	25		25 45 56			48	52			
	26	25 45 56				48	52			
28	25 45 56			48		52				
30				25 45 56	48	52				
35			25 45 56		48	52				
		25 45 56			48	52				
	25 45 56				48	52				
				25 45 56	48	52				
			25 45 56		48	52				



Order
Example

Teilenummer - D - L
DIN179A - D5.5 - L10