


OIL-FREE SINGLE HEEL GUIDE RAILS


—STANDARD TYPE (HEEL HEIGHT 5mm / COPPER ALLOY · SKS3)—

Ⓜ Bolt hole pitch designation type **P.707**




RoHS


■ Mounting bolt hole : 2



■ Mounting bolt hole : 3




■ Mounting bolt hole : 4

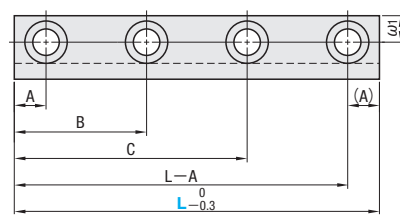

■ Table for Bolt Hole Size

W	T	d1	d2	t1	ω1
12.5	12.5	8	4.5	5	5
	15				
	20				
15	15	9.5	5.5	6	6
	20				
	25				



- Ⓜ GR5SZ ... Lubricating oil is not buried in the face that touches the top face of the slide core flange.
- Ⓜ All corners C ≤ 1 unless specified.
- Ⓜ Keep temperature under 80°C or lower.

Part Number	M	H
GR5Z	Grade-4 high strength brass (CAC304) (Old JIS : HBsC4) Special solid lubricant embedded	—
GR5SZ	SKS3 Special solid lubricant embedded	53~56HRC

Part Number Type	W	T Selection	L	No. of bolt holes	A	B	C	
								Order
GR5Z (Copper alloy CAC304)	12.5	12.5	40	2	7.5	30	50	Order
		15	50 60 70	3				Days to Ship
		20	80	4				Price
		15	90	2				Quotation
		20	100	3				Quotation
		15	40 50 60	2				Quotation
	15	70 80 90 100 110 120	3	Quotation				
		15	40 90	4	Quotation			
		20	45 95	4	Quotation			
		25	53 97	4	Quotation			
GR5SZ (SKS3)	12.5	15	40	2	7.5	30	50	Order
		20	50 60 70	3				Days to Ship
		80	4	Price				
	15	15	40 50 60	2	Quotation			
		20	70 80	3	Quotation			
		20	90 100	3	Quotation			

Part Number — T — L
GR5Z15 — 20 — 80

Quotation


Quotation

OIL-FREE SINGLE HEEL GUIDE RAILS

—STANDARD TYPE (HEEL HEIGHT 8mm / COPPER ALLOY · SKS3)—


Ⓜ Non JIS material definition is listed on P.1351 - 1352

Ⓜ Bolt hole pitch designation type **P.708**




RoHS


■ Mounting bolt hole : 2



■ Mounting bolt hole : 3




■ Mounting bolt hole : 4

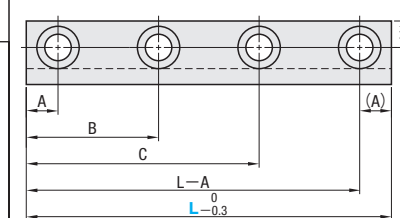

■ Table for Bolt Hole Size

W	T	d1	d2	t1	ω1
12.5	15	8	4.5	5	5
	20				
	15				
15	20	9.5	5.5	6	6
	25				
	30				
	15				
20	20	11	6.5	7	9
	25				
	30				
	35				
	15				
25	20	14	9	9	10
	25				
	30				



- Ⓜ GR8SZ ... Lubricating oil is not buried in the face that touches the top face of the slide core flange.
- Ⓜ All corners C ≤ 1 unless specified.
- Ⓜ Keep temperature under 80°C or lower.

Part Number	M	H
GR8Z	Grade-4 high strength brass (CAC304) (Old JIS : HBsC4) Special solid lubricant embedded	—
GR8SZ	SKS3 Special solid lubricant embedded	53~56HRC

Part Number Type	W	T Selection	L	No. of bolt holes	A	B	C	
								Order
GR8Z (Copper alloy CAC304)	12.5	15	40	2	7.5	30	50	Order
		20	50 60 70	3				Days to Ship
		15	80	4				Price
		20	90	2				Quotation
		15	40 50 60	2				Quotation
		20	70 80 90 100 110	3				Quotation
		15	120	4				Quotation
		20	130	4				Quotation
		25	140	4				Quotation
		30*	150	4				Quotation
		15	160	4				Quotation
		20	180	4				Quotation
	25	200	4	Quotation				
	20	20	50 60 70 80 90	2	10	55	105	Order
		25	100 110	3				Days to Ship
		30	120 (130) 140 (150)	3				Price
		20	160	4				Quotation
		25	180	4				Quotation
		30*	200	4				Quotation
		20	60 90	2				Quotation
		25	100 110 120 140 150	3				Quotation
		20	160	4				Quotation
		25	180	4				Quotation
		30	200	4				Quotation
GR8SZ (SKS3)		15	20	40 50 60				2
	25		70 80 90 100 110 120	3	Days to Ship			
	130		4	Price				
	20	20	60 70 80 90	2	10	—	—	Quotation
		25	100 110 120 130	3				Quotation
		30	100 110 120 130	3				Quotation

Ⓜ L dimensions in parenthesis are not applicable to T dimension marked*.

Part Number — T — L
GR8Z15 — 20 — 80

Quotation

Quotation