CAM DIAGRAM P.1283

MGFLL50 (θ =55-65)
MEFLL50 (θ =55-65)
(Economy type)

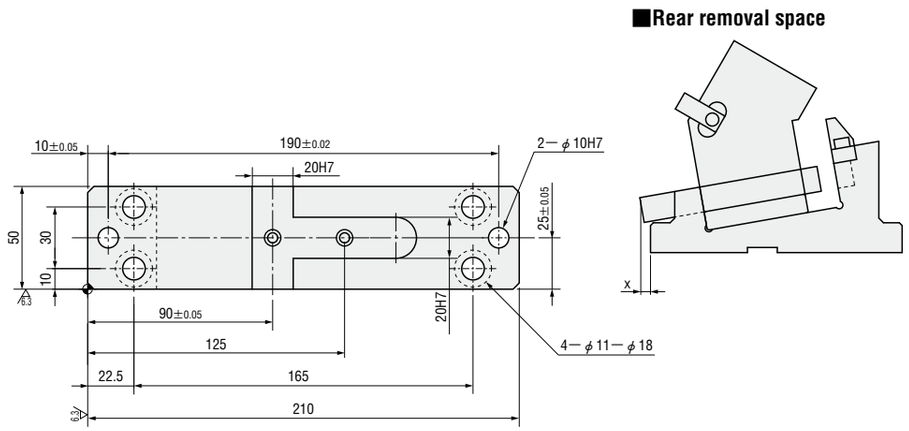

■Components table P.1287

W	θ	A	B	C	E	F	H	K	L	x
50	55	168.64	183.64	15	111.04	68.96	96.4	20	15	0
	60	162.61	187.61	25	118.08	61.92	98		16	
	65	155.95	190.95	35	125.44	54.56	99	15		

Slide Stroke S	Working force KN (tonf)		Spring load N (kgf)			Total weight kg	Catalog No.	W	θ
	Standard working force	Max. working force	Preload	5mm before bottom dead center	Max. load				
26.1	29.4 (3.0)	58.8 (6.0)	316 (32.2)	952 (97.1)	1105 (112.6)	9.5	MGFLL MEFLL (Economy type)	50	55
31.5			263 (26.8)	973 (99.2)		9.7			60
36.6				989 (100.8)		10.0			65

Order — Catalog No. | W | — | θ
MGFLL 50 — 60

Days to Ship: Quotation

Price: Quotation

Alterations — Catalog No. | W | — | θ | — | (N12・N13…etc.)
MGFLL 50 — 60 — K

Alterations	Code	Spec.
φ12H7 or φ13H7	N12	Change dowel hole diameter φ10H7 ⇨ φ12H7
	N13	Change dowel hole diameter φ10H7 ⇨ φ13H7
	K	Add 3 locating keys (With 3 hexagon socket head cap screws M8×15)
	KA	Add 3 stepped locating keys (With 3 hexagon socket head cap screws M8×15)